


RDG3



MADE IN ITALY <

GREAT VERSATILITY <


EXCELLENT FOR DEMOLITION & HANDLING <

HARDOX WEAR-RESISTANT PARTS <

INTERCHANGEABLE BLADES <

360° HYDRAULIC ROTATION <

MATCH IT WITH

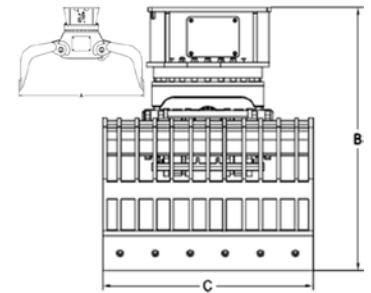

DATA SHEET

| | EU | USA |
|------------------------------|-----------|-----------|
| Excavator weight | 2,5 - 4 t | 2,5 - 4 t |
| Equipment weight | 270 kg | 595 lb |
| Opening A | 1050 mm | 41 inch |
| Height B | 940 mm | 37 inch |
| Width C | 500 mm | 20 inch |
| Maximum oil pressure | 180 bar | 2610 psi |
| Required oil supply | 25 L/min | 6 gal/min |
| Rotation oil pressure | 50 bar | 725 psi |
| Rotation oil flow | 15 L/min | 4 gal/min |